



# PRODUCT RANGE


## WALK BEHIND - RESIN BOND RANGE



### SPECIALTY RANGE

Speed, wear and broad application window. The 'do it all' range. Deep material clearing passages to exit dust and fresh densifier in a rigid tool to deliver flat uniformly honed surfaces fast. Suits low grit finishes on flat surfaces. 10 mm thickness ensures longer life and high value for money.

80mm (3" diameter)  
**Optimal grit range: 50-200**

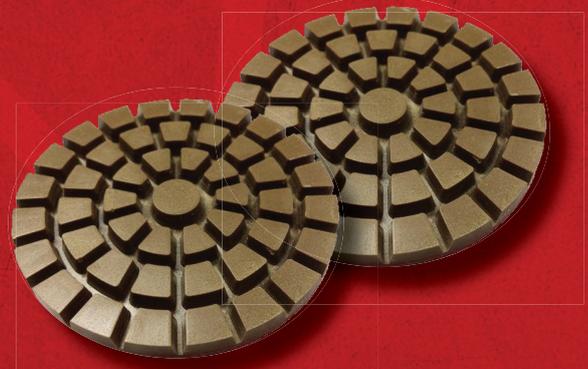

### UNIVERSAL RANGE

Speed, colour and excellent clarity. High refinement and low resin transfer is achieved with this multi-segmented, semi flexible high surface area resin. Suits low/high grit finishes on flat and wavy surfaces. 6mm thickness and high pad surface area.

80mm (3" diameter)  
**Optimal grit range: 100-800**



### FLEX 3

Sensational gloss, clarity and depth of colour. Highly flexible, and renowned for exceptional gloss at high speeds. 3mm thickness and high pad surface area.

80mm (3" diameter)  
**Optimal grit range: 200- 10,000**



### IMPACT3

Exceptional colour, clarity, and depth. Rigid design, broad application capacity that delivers exceptional colour on dark concrete and exotic aggregates. Suits low/high grit range on flat surfaces where attention to colour and depth is required. 6mm thickness and high pad surface area.

80mm (3" diameter)  
**Optimal grit range: 50-800**



### AQUA ZERO

With a highly consistent scratch pattern, exceptional for floor honing and polishing as well as wet cutting - power-trowelled/burnished concrete where zero aggregate exposure is required before densification. Long- life resin pads are rubber and velcro backed, increasing flexibility and smooth operation. 10mm thick abrasive layer.

80mm (3")  
**Optimal grit range: 50-400**

# HAND HELD - RESIN BOND RANGE




## HALO RANGE

Greater friction – faster gloss. Reduced tool surface area enhances downward pressure, increasing polishing speeds and gloss levels. The centreless, lightweight format lessens “centre bite” improving balance and control. Flexible and durable, use for unparalleled colour, clarity and gloss.

125mm (5”).


**Optimal grit range: 2500RPM**

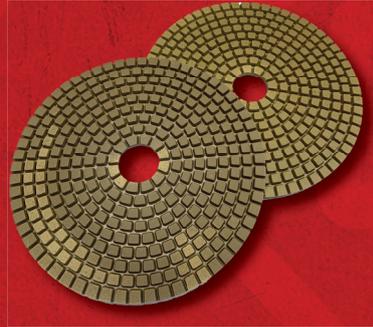

## FLEX 5

Ultimate shine and gloss levels with excellent scratch elimination, flexibility and durability at high speeds. For dry polishing on decorative, densified and some natural stone and terrazzo surfaces. 125mm (5”) with 3mm thickness and high pad surface area.

**Optimal range: 2500RPM**

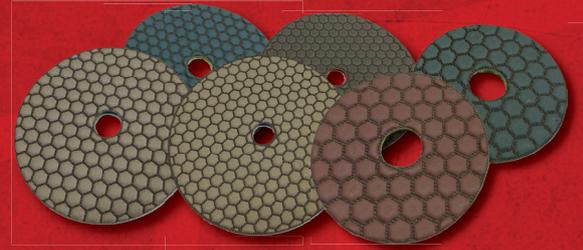

## HONEY 5 & 6

High polishing results and durability at a value price point. Long life tool suitable for all concrete types when pre-hardened with Formula Worx - Boost densifier.

125MM (5”), 150mm (6”), 75mm (3”)

**Optimal grit range: 2500RPM**




## AQUA EDGE

Combine with Aqua Zero 3” floor resins for a consistent transition and complimentary scratch pattern across edges and floor body. Exceptional for floor honing and polishing as well as wet cutting, power-trowelled/burnished concrete, where zero aggregate exposure is required before densification.

**Optimal grit range: 50-400**

Maximum recommended speed range: 4000rpm

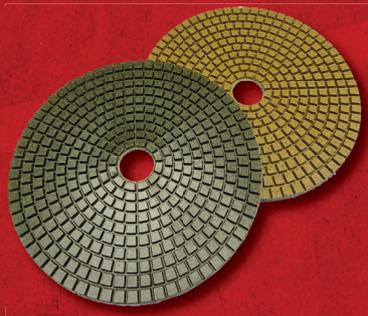


## IMPACT 5

Delivers incomparable high impact productivity & gloss. For ultimate shine, scratch elimination and longevity of tooling.

125mm (5”)

**Optimal grit range: 2500RPM**

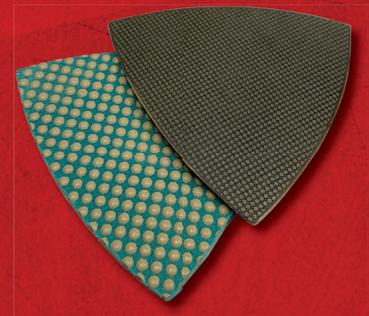

## TRIANGULAR 3

Remove hassle and create even colour transitions into corners and hard to reach areas where a consistent decorative finish is required across the entire floor when polishing dry. Velcro backed and suitable for triangular orbital sanders and some multi tools.

Triangular 80 x 80 x 80mm.

Money back satisfaction guarantee:  
(See [www.totallyworks.com](http://www.totallyworks.com) for our satisfaction guarantee)

5/176 Canterbury Road, Bayswater Nth, 3153, Vic,

**Tel: 1300 897 873 | [www.totallyworks.com](http://www.totallyworks.com)**

[sales@totallyworks.com](mailto:sales@totallyworks.com) | [www.facebook.com/totallyworks](http://www.facebook.com/totallyworks)

